

Unicare by ZING®

15 Gallon Portable Eyewash Station

Part Number:
96001292001

Technical Data

Type:	Self-Contained Portable Eyewash
Capacity:	15 gal. (56 L)
Unit Material:	LDPE
Nozzle Material:	ABS Plastic
Product Dimensions:	24"L x 19"W x 19.5"D
Operation:	Gravity Fed
Mount Type:	Wall Mounted (Bracket Included) / Portable
Activation:	Pull Strap
Flow Rate:	0.4 GPM Minimum
Flush Duration:	15 Minutes Minimum
Water Requirements:	Potable, Tepid Water
Water Temperature:	60°F-100°F (Recommended)
Compliance:	ANSI/ISEA Z358.1-2014

Packaging Details

Package Quantity:	1 Each
Weight:	36 lbs.
Dimensions:	24"L x 19"W x 19.5"D
UPC:	810224584015
Country of Origin:	India



Unicare™
by ZING

Product Description

- 15-gallon (56 L) capacity provides continuous emergency flushing
- Gravity-fed design requires no plumbing or pressurization
- Simple pull-strap activation starts water flow quickly
- Provides at least 15 minutes of continuous flushing
- Portable design provides emergency eyewash access where plumbed units are unavailable
- Wall-mountable design helps keep the unit accessible and ready for emergency use



© 2026 ZING Green Safety Products

Visit Us Online:

zinggreenproducts.com

Call Today: 888.543.9464

ZING®
Green Safety Products

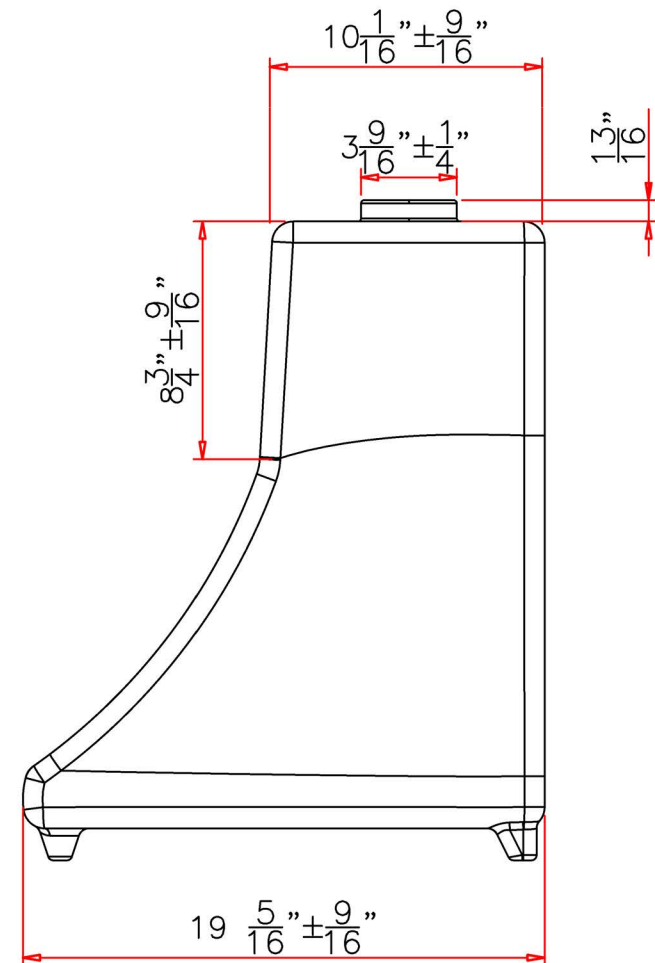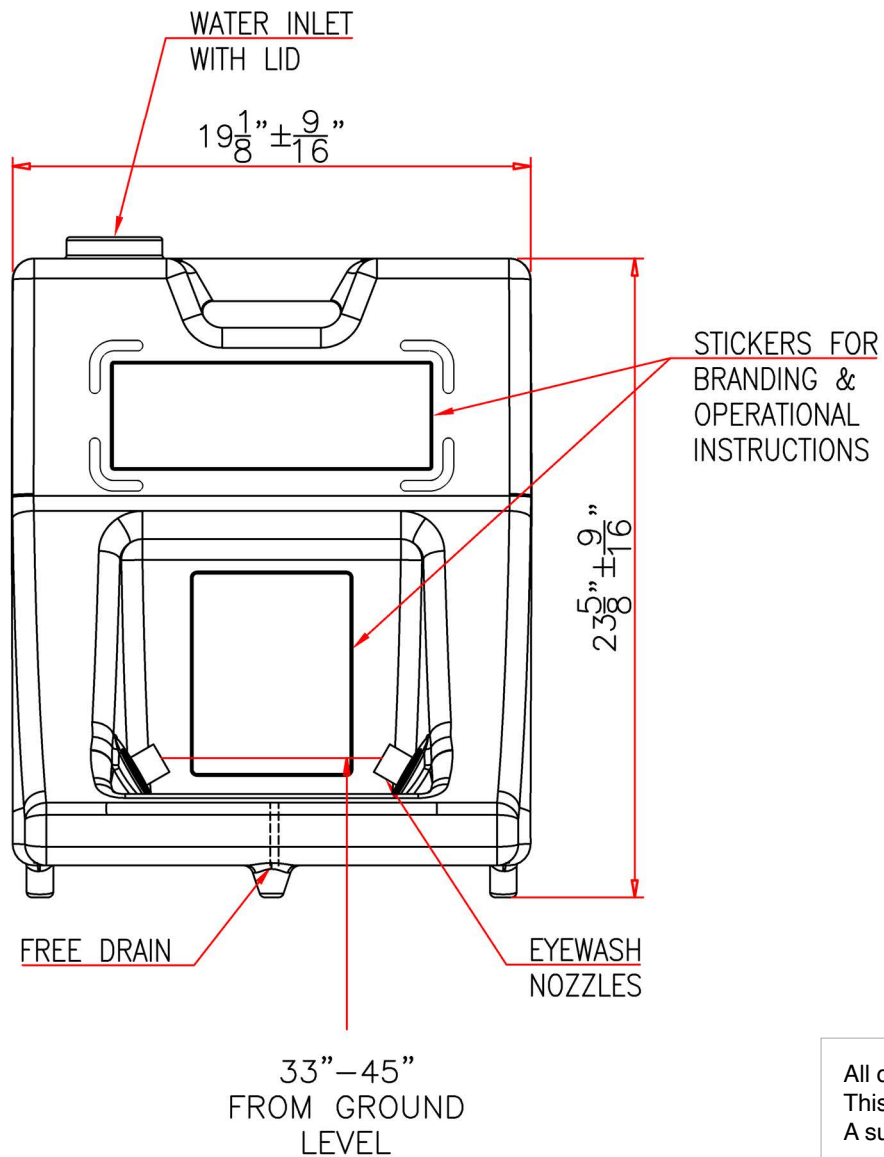

All dimensions are in inches unless otherwise specified.
This is a gravity-fed device and does not require pressurization.
A suitably sized drain collection bin is required.

Visit Us Online:

zinggreenproducts.com

Call Today: 888.543.9464

ZING[®]
Green Safety Products