Unicare by ZING®
Combination Safety Shower & Eye/Face Wash
with ABS Dome and Stainless Steel Bowl

Part Number:
53111121

Technical Data

General	
Type:	Combination Safety Shower & Eye/Face Wash
Mount:	Floor/Pedestal Mount
Pipe/Fitting Material:	Galvanized Steel
Inlet Size:	1 1/4" NPTF
Drain Size:	1 1/4" NPTF
Water Requirement:	Potable, Tepid Water
Water Temperature:	60°F-100°F (Recommended)
Operating Pressure:	30 PSI (Recommended)
Compliance:	3rd Party UL Tested to ANSI/ISEA Z358.1-2014
Safety Sign Included:	Yes
Inspection Tag Included:	Yes

Eye/Face Wash	
Bowl Material:	Stainless Steel
Spray Nozzle Material:	ABS Plastic
Valve Size/Material:	1/2" / Brass
Activation:	Push Plate
Flow Rate:	3.0 GPM Minimum

Safety Shower	
Shower Dome Material:	ABS Plastic
Valve Size/Material:	1" / Brass
Activation:	Pull Rod
Flow Rate:	20 GPM Minimum

⚠ ***WARNING:*** *Cancer and Reproductive Harm-www.P65Warnings.ca.gov*



Unicare by ZING

Product Description

- Combination unit provides emergency eye/face and full-body flushing in one station
- High-visibility yellow ABS shower dome, and a durable stainless steel eyewash bowl, this unit is designed for dependable performance in demanding work areas
- Separate push-plate and pull-rod activation
- Stay-open valves allow continuous hands-free flushing once activated
- Eye/face wash features a built-in pressure compensator, filter, and aerator for soothing, precise flow
- 100% hydrostatically tested to help ensure secure, reliable connections



Unique "swirlflow" shower head design delivers a deluge of water



Dual eyewash spray nozzles provide a controlled flow for emergency eye and face flushing

Packaging Details

Package Quantity:	1 Each
Approx. Weight:	44 lbs.
Dimensions:	28" x 12" x 9"
UPC:	810224583735
Country of Origin:	India

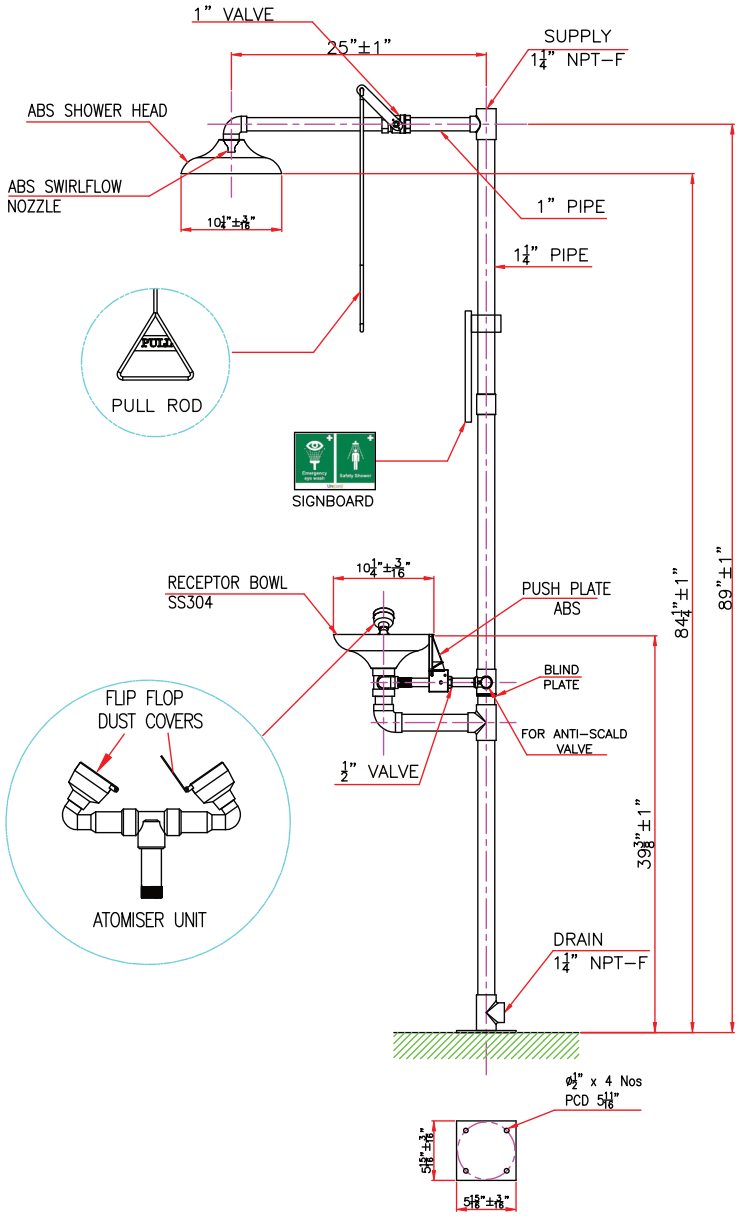

All dimensions are in inches unless otherwise specified.

© 2026 ZING Green Safety Products

Visit Us Online:
zinggreenproducts.com

Call Today: 888.543.9464

ZING® Green Safety Products